




Wooden Rocking Horse Assembly Instructions








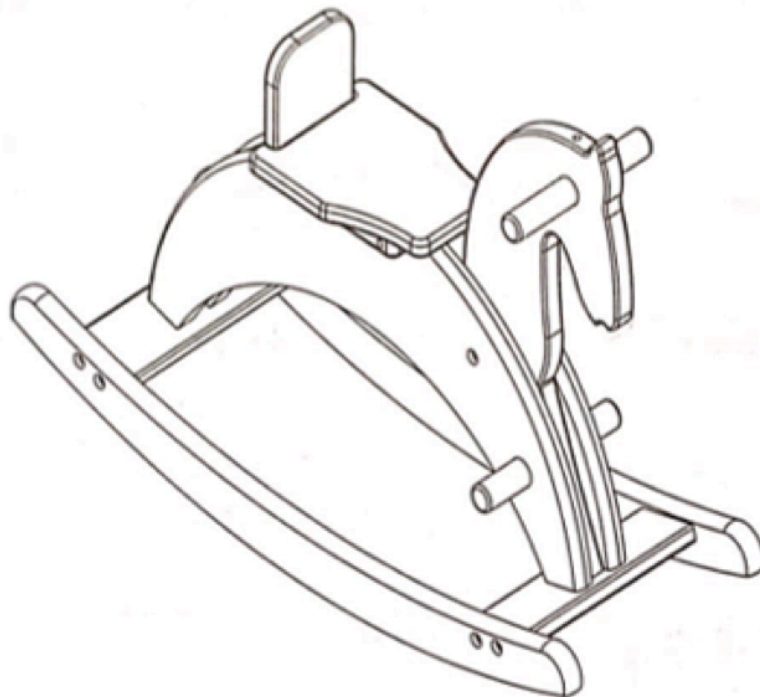









Keep for future reference


Please read the instructions carefully before using this product




Parts included:

				
A X 1	B X 1	C X 1	D X 2	
				
E X 1	F X 1	G X 1	H X 1	
				
I X 2				
				
AA, M6 X 30=13	BB, M6 X 60=9	CC, M6 X 13=8	DD, D4 X 40=2	EE, 1
				
FF X 16				

Step 1:
Assemble of base:

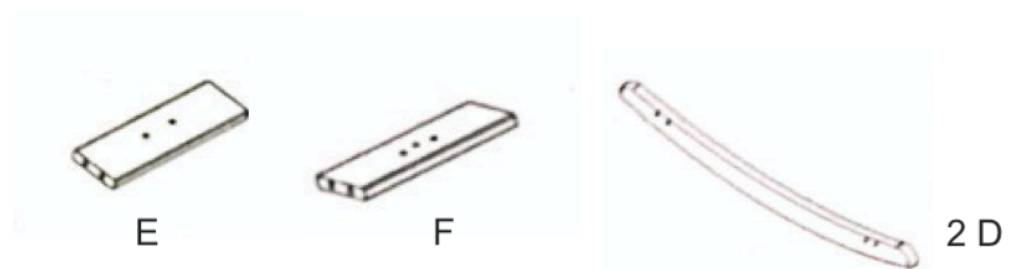


Part E with 3 holes will be the front base of the rocking horse and part F (with 2 holes) will be the back.
Add 4 CC bolts to the bottom side of part F.
Join E and F with the two curved planks D using 4 BB screws each.

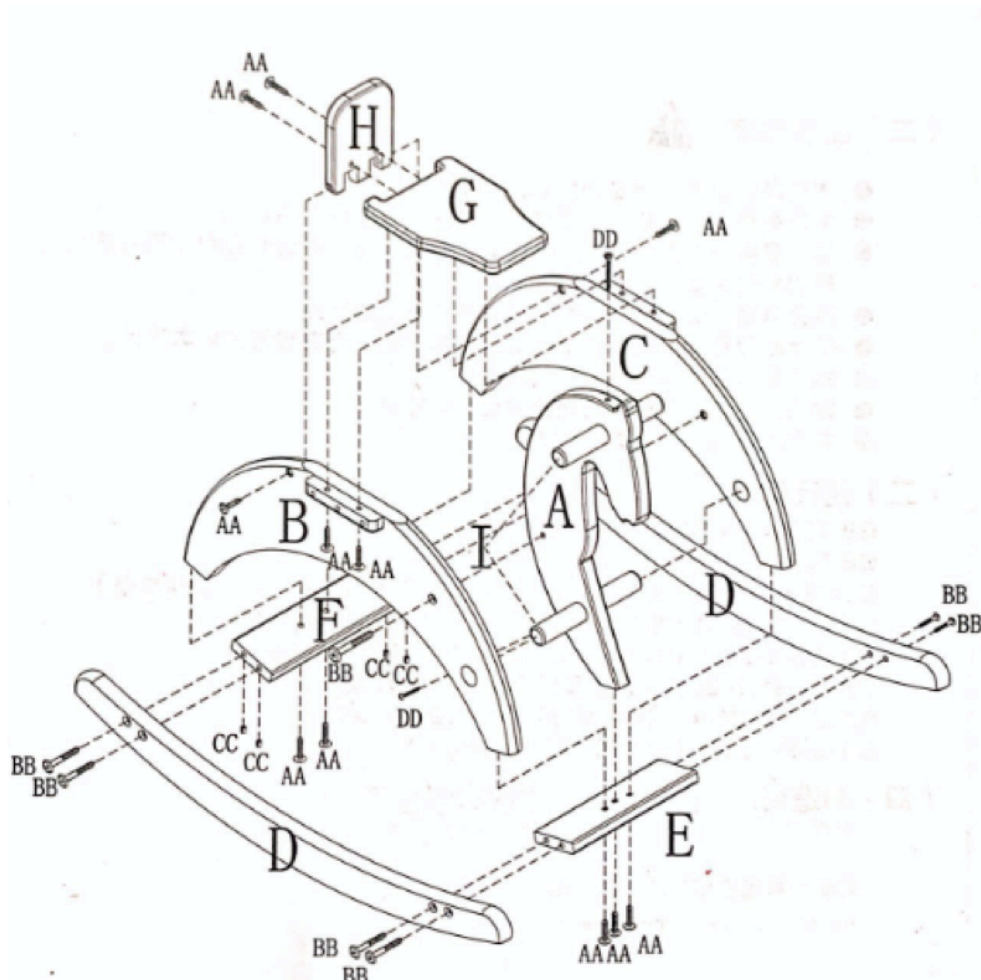



Step 2:

Assemble of body:

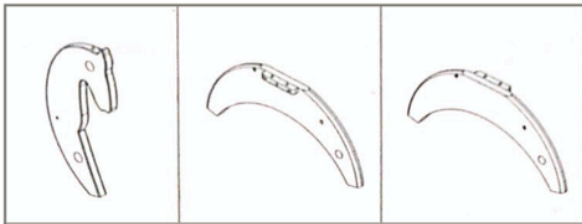

A

B

C

Use FF rings with AA screws.


Join part A, B and C to E using 3 AA screws (1 each).

Join part B and C to F using 2 AA screws (1 each).

Join part A, B and C with each other using 1 BB screw.

Step 3:

Assemble of remaining parts:

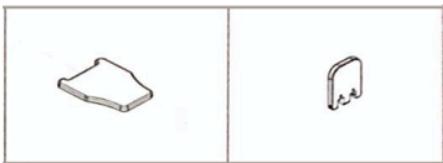

G

H

Screw in the seat G using 4 AA screws (2 on each side).

Then join the backrest H to the seat G using 2 AA screws from the back and 1 AA screw from each side.

Insert the handles and footrest rods (2 I) and screw them in using 2 DD screws (1 each)